


## Label Requirements:

- 1.) Must be on 3" core
- 2.) Must have approximately an 1/8" gap between labels
- 3.) Must be in copy position 4
- 4.) Maximum roll diameter 12"
- 5.) Avoid clear backing for labels.
- 6.) Clear labels require a Clear Label Sensor Kit it is an \$1,800 upgrade.

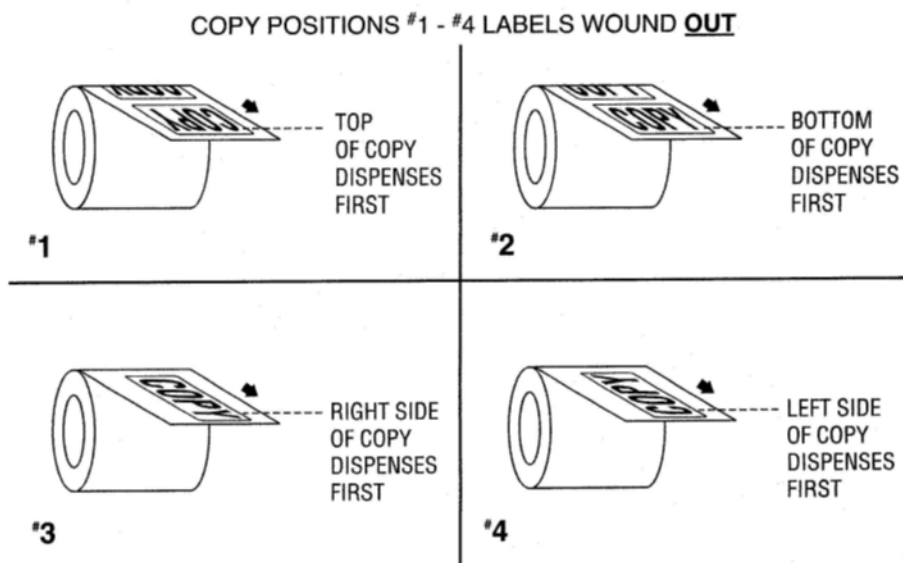

NOTE – Narrow labels will work, but must be on backing paper of at least 1 1/2" wide.