

SB-EX-Ran

Random Side-Belt Case Taper

- Top & Side Belt Drive
- Minimum Box Size: 5"(L) x 4.5"(W) x 4.5"(H)
- Maximum Box Size: ∞"(L) x 23"(W) x 23"(H)
- Dual 1/4 HP drive motors
- Tape Speed: 30 cases/min
- Belt Speed: 75ft/min



The SB-EX Random allows users to run a variety of case sizes without having to manually adjust for each box. The system's unique and simple design has proven to be one of the most reliable case tapers on the market today, keeping production and maintenance efforts to a minimum and providing fast and efficient alternatives to hand taping.

- Top and bottom tape heads are interchangeable and designed for easy threading
- Side rail width and tape head height adjustments are made automatically
- R1 memory function eliminates full travel of the tape head and reduces wear
- Top and bottom tapeheads are identical and can be removed without tools.



Cleveland Equipment


866-888-6327

sales@clevelandequipment.com

www.clevelandequipment.com

SB-EX-Ran

Random Side-Belt Case Taper

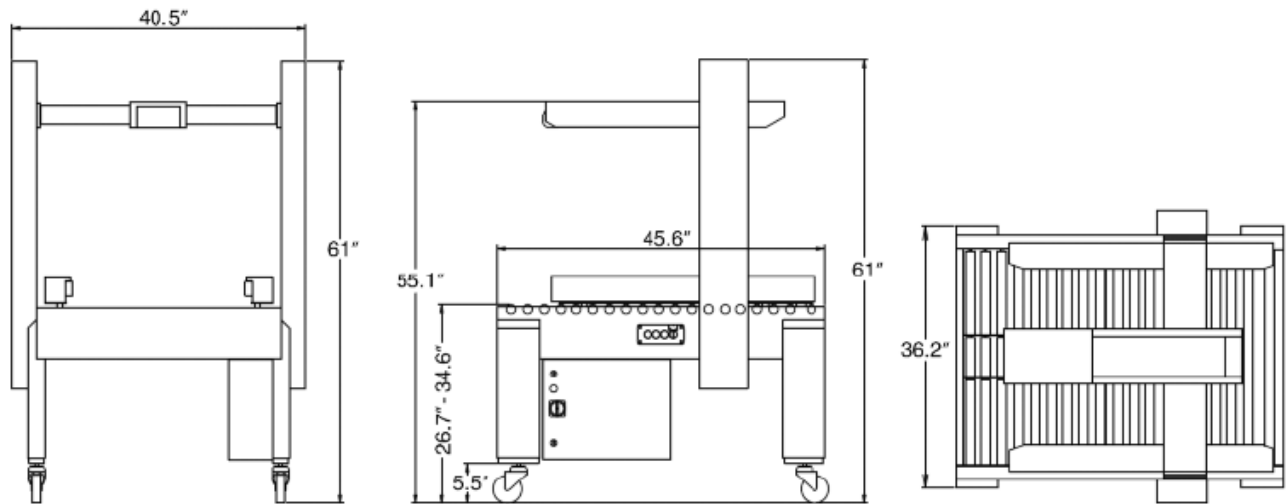

SB-EX-RAN FEATURES	SB-EX RAN TAPING SPECIFICATIONS				
<ul style="list-style-type: none">• Box depth memory function• Plug-in and go operation• Accommodates wide box sizes• Industrial strength side belts• Interchangeable top and bottom tape cartridges• Adjustable leg extensions• Casters for transportation within plant• Emergency stop button• Reset button• Powder coated 12 gauge steel• Low maintenance	Sealer Type	Random side belt, top and bottom case sealer			
	Machinery Makeup	Industrial strength 12 gauge steel, powder coated for durability			
	Belt Speed	75 fpm			
	Tape Speed	15-20 cases per min., depending on box size and operator			
	Height Adjustment	Standard adjustable legs for 21.2” to 34.6” conveyor heights			
	BOX SPECIFICATIONS		Length	Width	Depth
	Minimum Box Size		5”	4.5”	4.5”
	Maximum Box Size		Infinite	23.0”	23.0”
	Tape Size		2” wide pressure sensitive tape, up to 15” diameter rolls, optional 3” wide tape		
	Tape Cartridge with top		Proven design requires no lubrication, designed for simple tape threading, removable for maintenance and interchangeable		
Drive Motor		Two (2) drive motors			
Electrical Requirements		110 VAC, 60Hz, 4.0A			
Air Requirements		80 PSI			
Agency Approvals		CE Certification			
SB-EX-RAN OPTIONAL ACCESSORIES					
3” Tape Head		Accepts 3” wide tape rolls, can be converted in the field			
Safety Enclosure		Full plexiglass enclosure walls for operator safety			
Front And Rear Packing Table		Roller tables bolt before or after taping system to allow for case movement			



Cleveland Equipment

866-888-6327

sales@clevelandequipment.com

www.clevelandequipment.com