
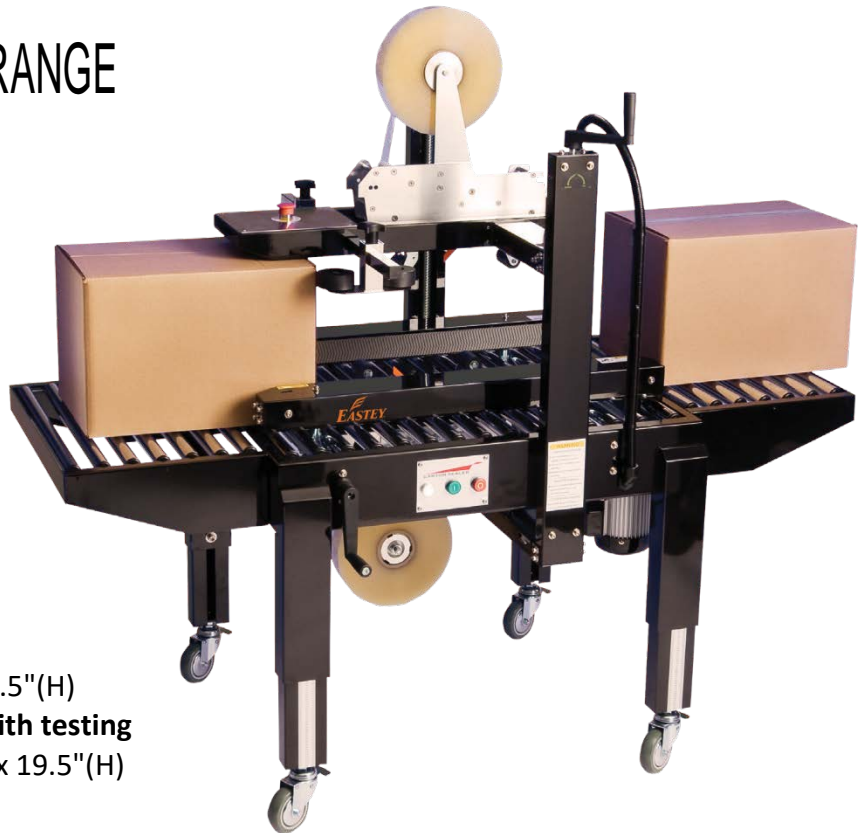



SB-EX

Side Belt Industrial Case Taper

WIDE STANDARD CASE RANGE



- Side Belt Drive
- **Minimum Box Size:** 5"(L) x 4.5"(W) x 4.5"(H)
* May be able to run smaller boxes with testing
- **Maximum Box Size:** ∞"(L) x 19.5"(W) x 19.5"(H)
- Dual 1/4 HP motors
- Tape Speed: 30 cases/min
- Belt Speed: 75ft/min

The SB-EX's side belts are great for light or heavy weight, narrow or small boxes. It is ideal for void-fill cases where the packaged product does not support the box. SB-EX offers fast and easy case changes with adjustable side rails and flexibility for boxes 5" long and greater. Adjustments can be made on the fly with easy hand tighten knobs and cranks which can be attached to either side of the machine. SB-EX utilizes easy to load top and bottom tape cartridges and will seal boxes as narrow as 4.5" wide and as low as 4.5" tall.




Cleveland Equipment

866-888-6327

sales@clevelandequipment.com

www.clevelandequipment.com

SB-EX SIDE BELT CASE TAPER

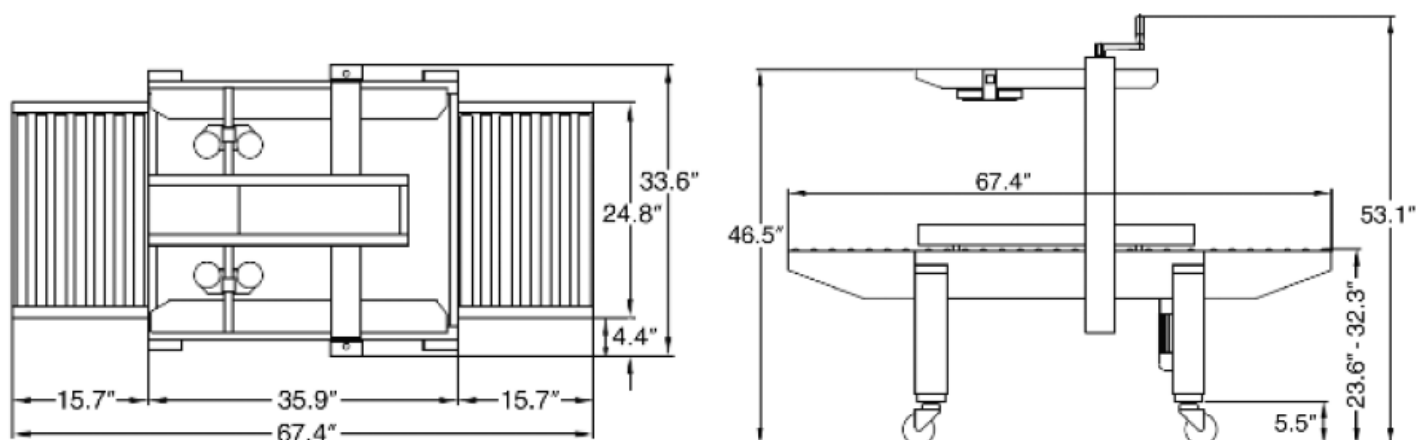

SB-EX FEATURES		SB-EX TAPING SPECIFICATIONS			
<ul style="list-style-type: none"> • Plug-in and go operation • Fast and easy box size changes • Industrial strength side belts • Interchangeable top and bottom tape cartridges • Emergency stop button • Adjustable leg extensions • Casters for transportation within plant • Front and rear pack tables to allow for case packing • Top squeezers push top flaps together for accurate case sealing • Powder coated 12 gauge steel • Low maintenance, no air required 	Sealer Type	Side belt, top and bottom case sealer			
	Machinery Makeup	Industrial strength 12 gauge steel, powdered coated for durability			
	Belt Speed	75 fpm			
	Tape Speed	30 cases per min., depending on box size and operator efficiency			
	Conveyor Height Adj.	18.1" to 32.3"			
	BOX SPECIFICATIONS		Length	Width	Depth
	Minimum Box Size		5"	4.5"	4.5"
	Maximum Box Size		Infinite	19.5"	19.5"
	Tape Size	2" wide pressure sensitive tape, up to 15" diameter rolls, optional 3" wide tape			
	Tape Cartridge	Proven design requires no lubrication, designed for simple tape threading, removable for maintenance and interchangeable with top or bottom cartridges			
SB-EX OPTIONAL ACCESSORIES					
3" Tape Head		Accepts 3" wide tape rolls			
Stainless Finish		Complete stainless finish to meet specific application requirements			



Cleveland Equipment

866-888-6327

sales@clevelandequipment.com

www.clevelandequipment.com